
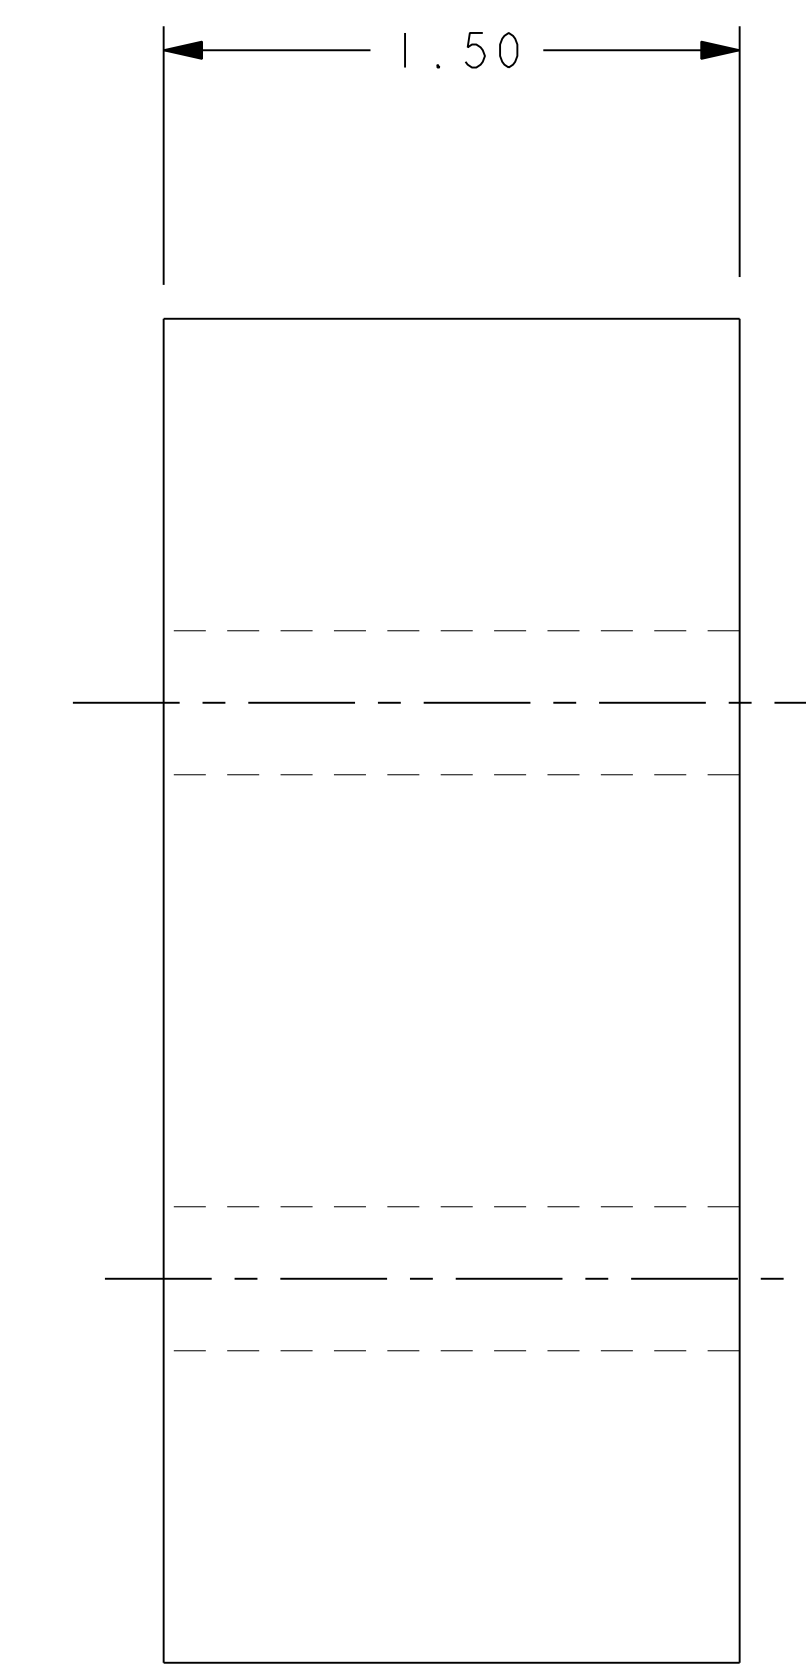
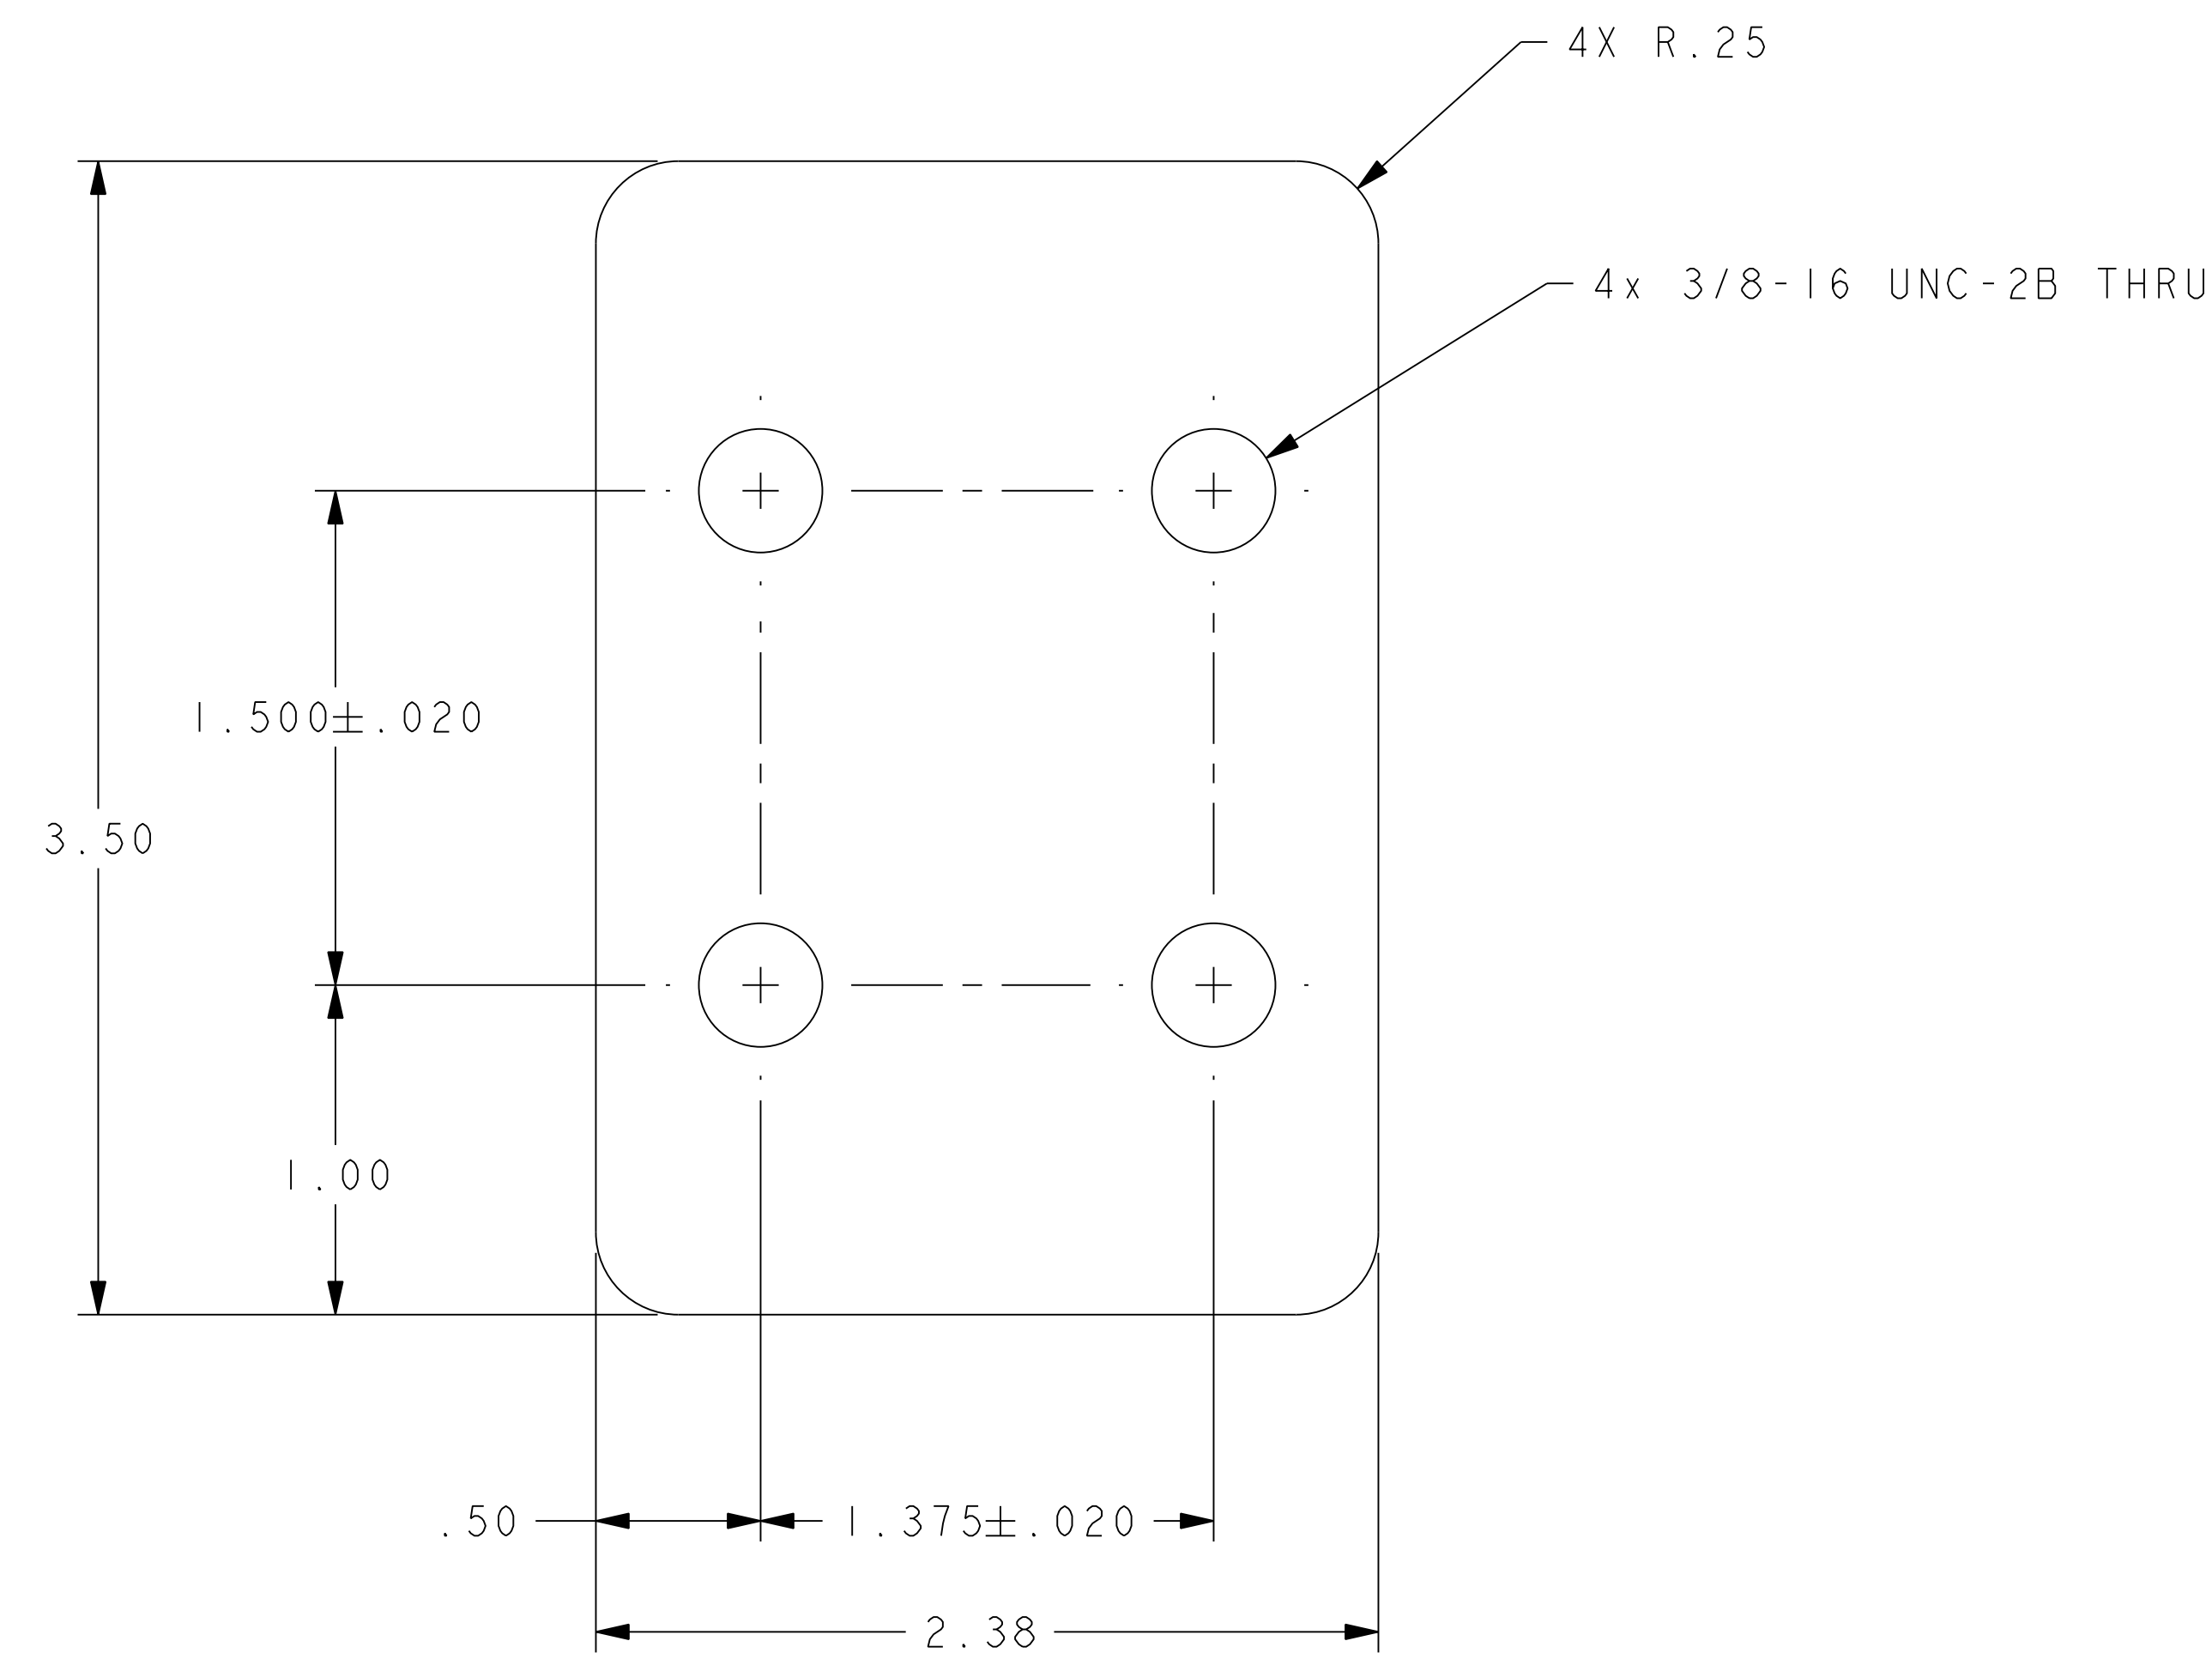


NO.	REVISION	BY	CH	SUP	APPROVED	DATE

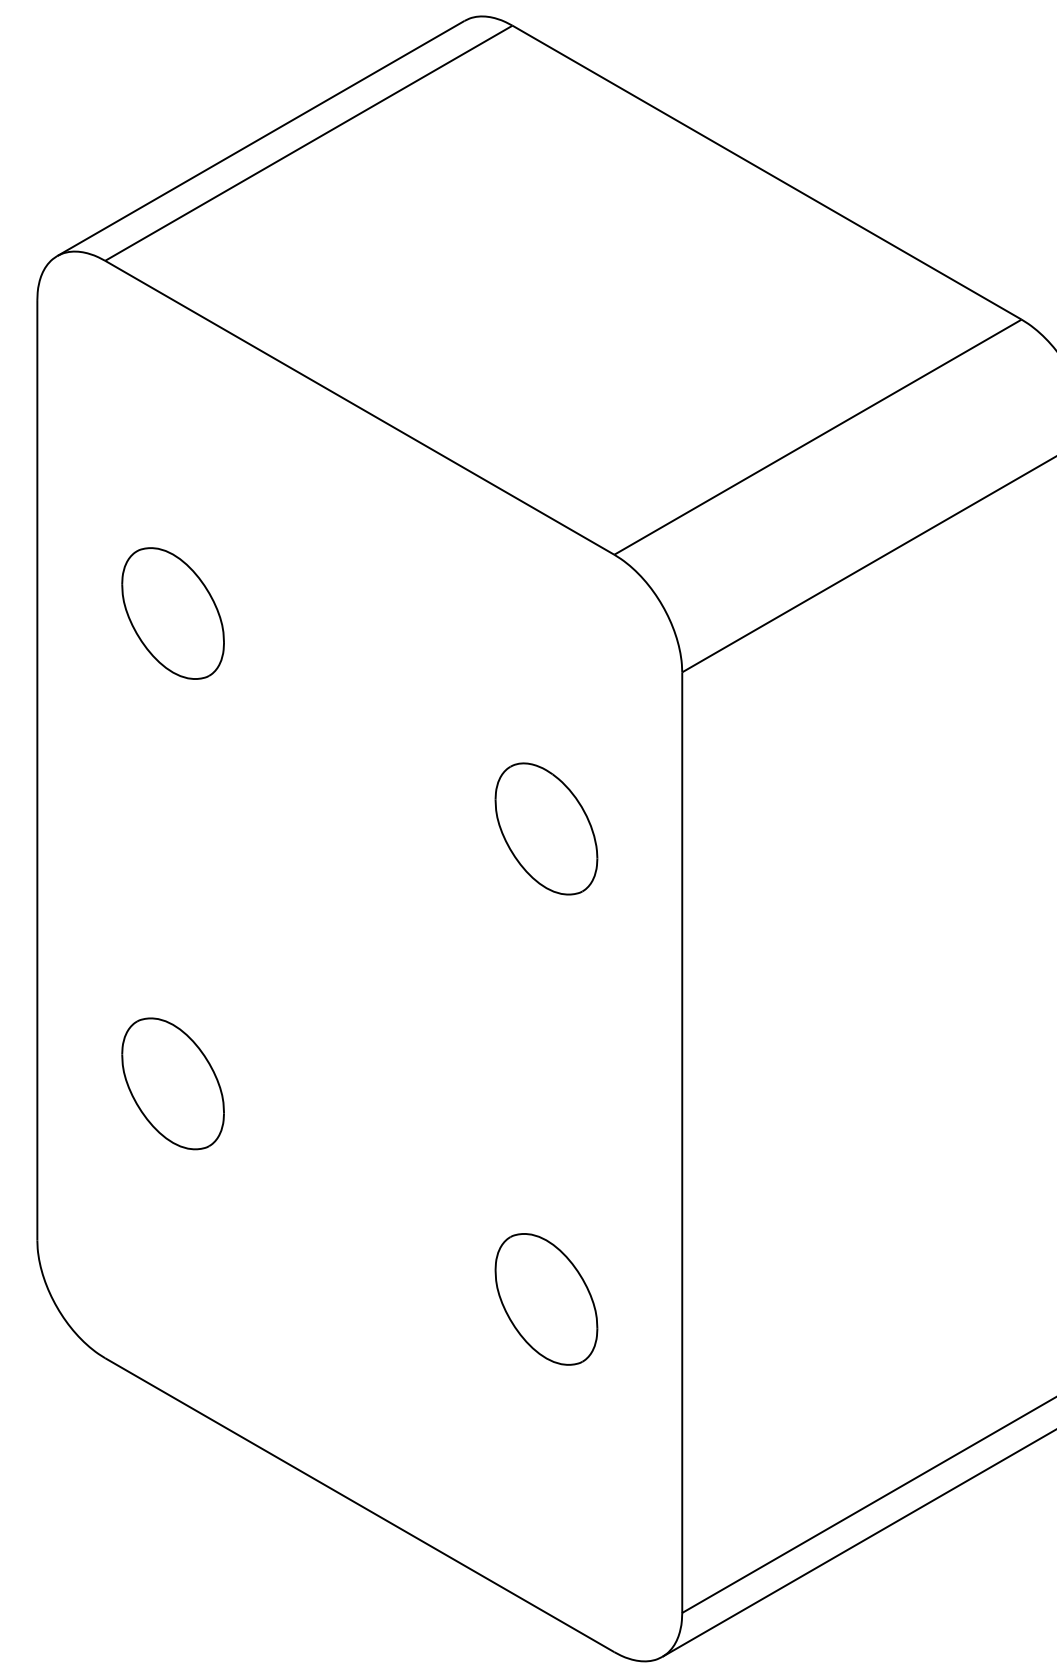

RELEASED FOR
FABRICATION / INSTALLATION
PPPL Drawing

NOTES:
 1. VENDOR TO CERTIFY THAT STOCK MATERIAL EXHIBITED MAGNETIC PERMEABILITY OF LESS THAN 1.02 μ_0 .
 2. IF AFTER WORKING OR MACHINING PART HAS MAGNETIC PERMEABILITY GREATER THAN 1.02 μ_0 , THEN PART IS TO BE VACUUM HEAT TREATED AT 1100°C FOR 2.5 HRS TO BRING THE MAGNETIC PERMEABILITY BELOW 1.02 μ_0 .

PART NO.	DRAWING/MODEL NO	NOMENCLATURE OR DESCRIPTION	MATERIAL	QTY RECD
	SE133-082	TRIM COIL BRACKET #3 & #4 SPACER	316 SS/STL	
PARTS LIST				
WEIGHT		COMPUTER GENERATED DRAWING MANUAL CHANGES NOT PERMITTED Pro E	CENTRAL FILES: UNLESS OTHERWISE SPECIFIED	PRINCETON PLASMA PHYSICS LABORATORY PRINCETON UNIVERSITY
11.7 lbs		DO NOT VERIFY INFORMATION BY SCALING DRAWING	DIMENSIONS ARE IN INCHES MACHINE SURFACES \sqrt{V}	NATIONAL COMPACT STELLARATOR EXPERIMENT
MODEL NAME	SE133-082	NEXT ASSEMBLY	TOLERANCES NON-CUMULATIVE DECIMAL-INCH FRACTIONS .XX ±.000 .XXX ±.005 ANGULAR ±.0°-15°	STELLARATOR CORE TRIM COILS TRIM COIL BRACKET #3 & #4 SPACER
			DSN: R. UPCAVAGE 6/12/08	DRAWING NO: SE133-082
			ENGR: M. KALISH 6/12/08	
			SUPV: J. SIEGEL 6/12/08	SHEET 1 OF 1 REV -

RELEASE LEVEL: Fabrication
 DWG VERSION NO: 11

NCSX-SE133-082