


Hi-Temperature Inconel Overbraided Ceramic Fiber Insulated Thermocouples



- ✓ High-Temperature Ceramic Insulation with Inconel Overbraid
- ✓ Flexible, Abrasion Resistant
- ✓ Withstand Temperatures up to 1090°C (2000°F)
- ✓ Unexcelled Oven and Furnace Profiling
- ✓ 5 Convenient Styles for Easy Application
- ✓ J, K, E, or N Thermocouple Calibrations

\$35
Basic Unit

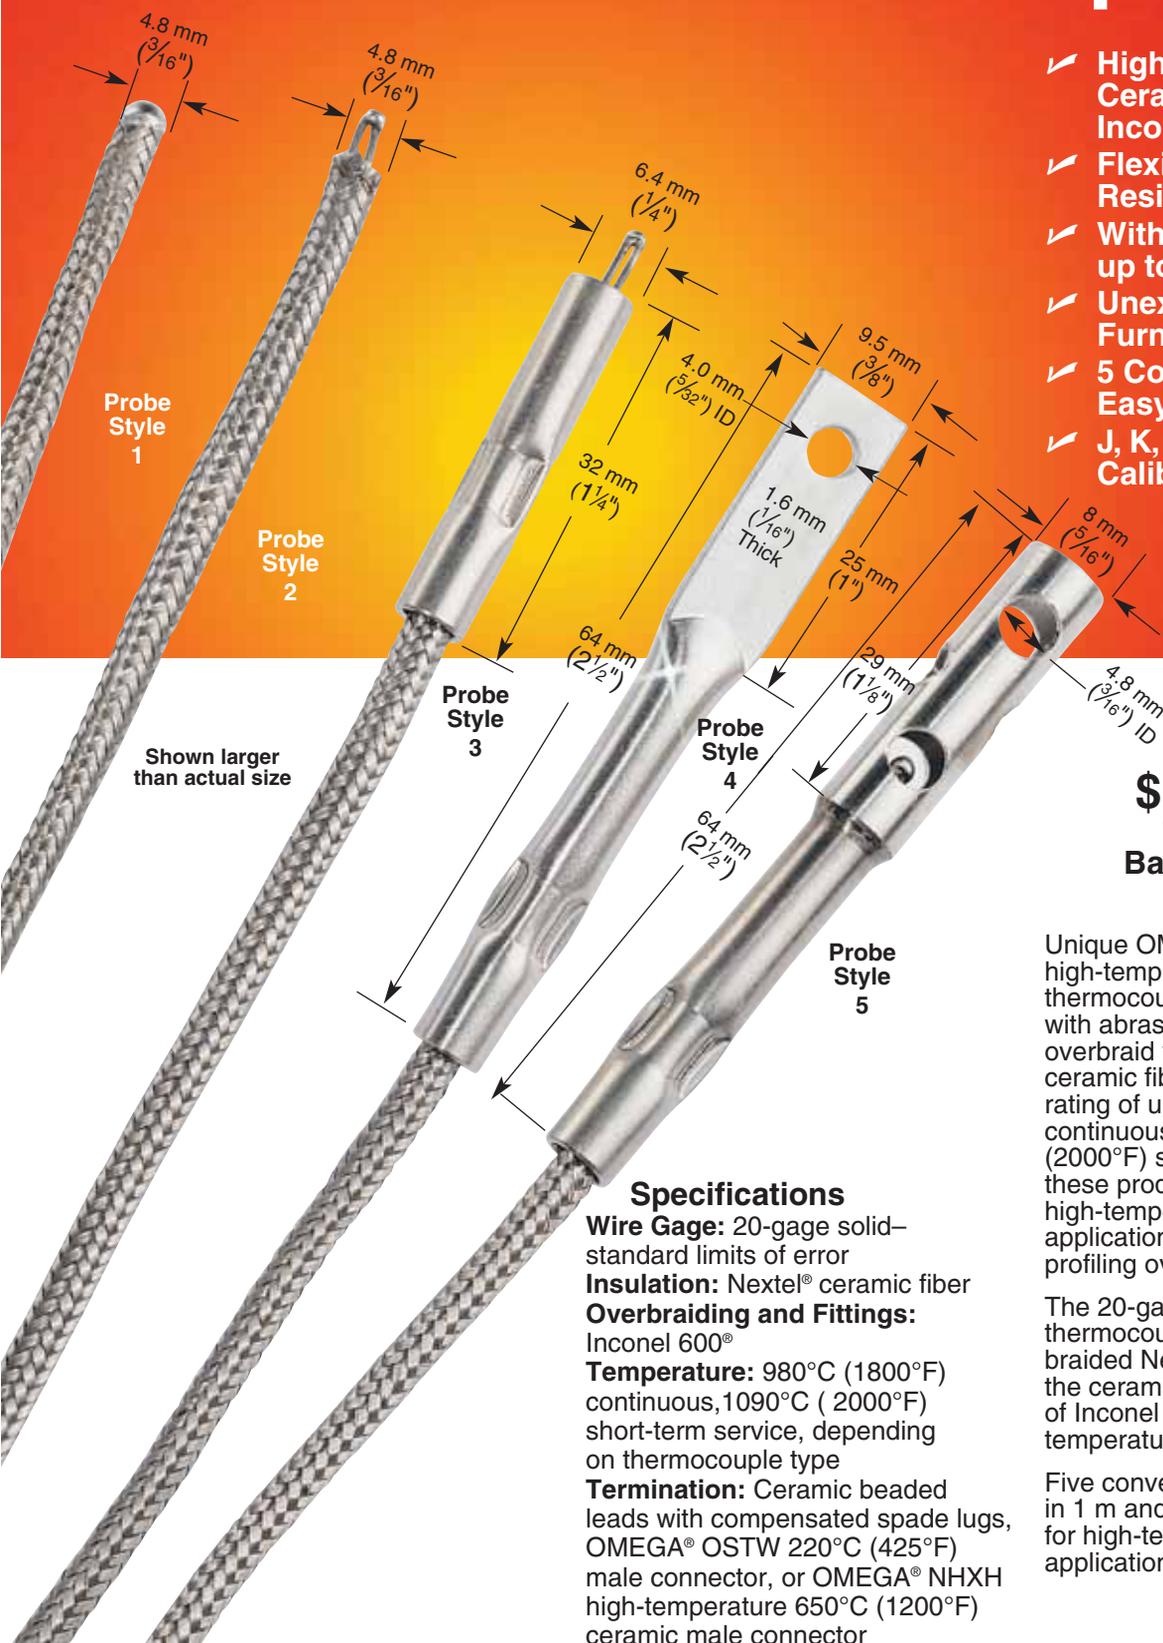

Specifications

Wire Gauge: 20-gage solid—standard limits of error

Insulation: Nextel® ceramic fiber

Overbraiding and Fittings:

Inconel 600®

Temperature: 980°C (1800°F) continuous, 1090°C (2000°F) short-term service, depending on thermocouple type

Termination: Ceramic beaded leads with compensated spade lugs, OMEGA® OSTW 220°C (425°F) male connector, or OMEGA® NHXH high-temperature 650°C (1200°F) ceramic male connector

Unique OMEGA® family of high-temperature types J, K, E, or N thermocouples are double-protected with abrasion-resistant Inconel overbraid with high-temperature ceramic fiber insulation. A temperature rating of up to 980°C (1800°F) continuous service and 1090°C (2000°F) short-term service makes these products ideal for many high-temperature measurement applications. They are unexcelled for profiling ovens and furnaces.

The 20-gage solid conductor thermocouple wires are insulated with braided Nextel® ceramic fiber. Over the ceramic fiber is a rugged overbraid of Inconel 600®—a tough, high-temperature, high nickel-content alloy.

Five convenient styles are available in 1 m and 3 m (3' and 10') lengths for high-temperature measurement applications.



Style 1

Style 1 is a grounded junction thermocouple with the Inconel overbraid welded to form a smooth rounded tip for all general purpose applications.



Style 2

Style 2 is a general purpose, bead welded, exposed junction thermocouple.



Style 3

Style 3 is an exposed, bead welded junction thermocouple with an Inconel collar to clamp the probe to a surface, or to secure it into a hole or any fabrication.



Style 4

Style 4 is grounded. It can be bolted to a surface, or the Inconel eye can hook the thermocouple to a conveyor flight. Ungrounded units are available. Contact Sales department for more information.



Style 5

Style 5 has an Inconel air hood to protect the exposed beaded wire junction. This design can be clamped to a surface, hooked to a conveyor flight, or bolted to a surface by using the through hole at the open end of the hood.



XCIB-4, shown, attaches easily for accurate, high-temperature measurement

ALL MODELS AVAILABLE FOR FAST DELIVERY!

To Order (Specify Model Number)

Model Number	Probe Style	Termination Type	Price 1 m (3')	Price 3 m (10')	Model Number	Probe Style	Termination Type	Price 1 m (3')	Price 3 m (10')
XCIB-(*)-1-1-(**)	1	1	\$43	\$57	XCIB-(*)-4-1-(**)	4	1	\$48	\$62
XCIB-(*)-1-2-(**)		2	35	49	XCIB-(*)-4-2-(**)		2	46	60
XCIB-(*)-1-3-(**)		3	38	52	XCIB-(*)-4-3-(**)		3	49	63
XCIB-(*)-1-4-(**)		4	40	54	XCIB-(*)-4-4-(**)		4	46	60
XCIB-(*)-2-1-(**)	2	1	43	57	XCIB-(*)-5-1-(**)	5	1	51	65
XCIB-(*)-2-2-(**)		2	35	49	XCIB-(*)-5-2-(**)		2	51	65
XCIB-(*)-2-3-(**)		3	38	52	XCIB-(*)-5-3-(**)		3	54	68
XCIB-(*)-2-4-(**)		4	40	54	XCIB-(*)-5-4-(**)		4	49	63
XCIB-(*)-3-1-(**)	3	1	46	60	Price per additional 1', up to 50': \$3.60 Price per additional 1', over 50': \$3.00				
XCIB-(*)-3-2-(**)		2	40	54					
XCIB-(*)-3-3-(**)		3	43	57					
XCIB-(*)-3-4-(**)		4	44	58					


* Specify thermocouple type: J: Iron-Constantan, K: CHROMEGA®-ALOMEGA®, E: CHROMEGA®-Constantan, N: OMEGALLOY®-NICROSIL-NISIL Use prefix of "CAL-" for assemblies to be supplied with calibration data at specified temperatures. Check Sales dept. for pricing.

** Specify length in feet: 3' or 10' standard.


Note: Available with silica insulation. Change "XCIB" in model number to "XSIB". No extra charge.

Ordering Example: XCIB-K-1-3-10, XCIB type K probe, probe style 1 with termination type 3 m (10') length, \$52.


Termination Types




1. Ceramic beaded leads with compensated spade lugs



2. Type OSTW male standard thermocouple connector to 220°C (425°F)



3. Type NHXH male ceramic connector to 650°C (1200°F)



4. Nextel® insulated leads with compensated spade lugs.



UNITED STATES

www.omega.com
1-800-TC-OMEGA
Stamford, CT.

CANADA

www.omega.ca
Laval(Quebec)
1-800-TC-OMEGA

GERMANY

www.omega.de
Deckenpfronn, Germany
0800-8266342

UNITED KINGDOM

www.omega.co.uk
Manchester, England
0800-488-488

FRANCE

www.omega.fr
Guyancourt, France
088-466-342

CZECH REPUBLIC

www.omegaeng.cz
Karviná, Czech Republic
596-311-899

BENELUX

www.omega.nl
Amstelveen, NL
0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters