


TYPE C

SHIPPING CONTAINER CONCEPT

K. BOWLING

9-JUL-2005

WTM

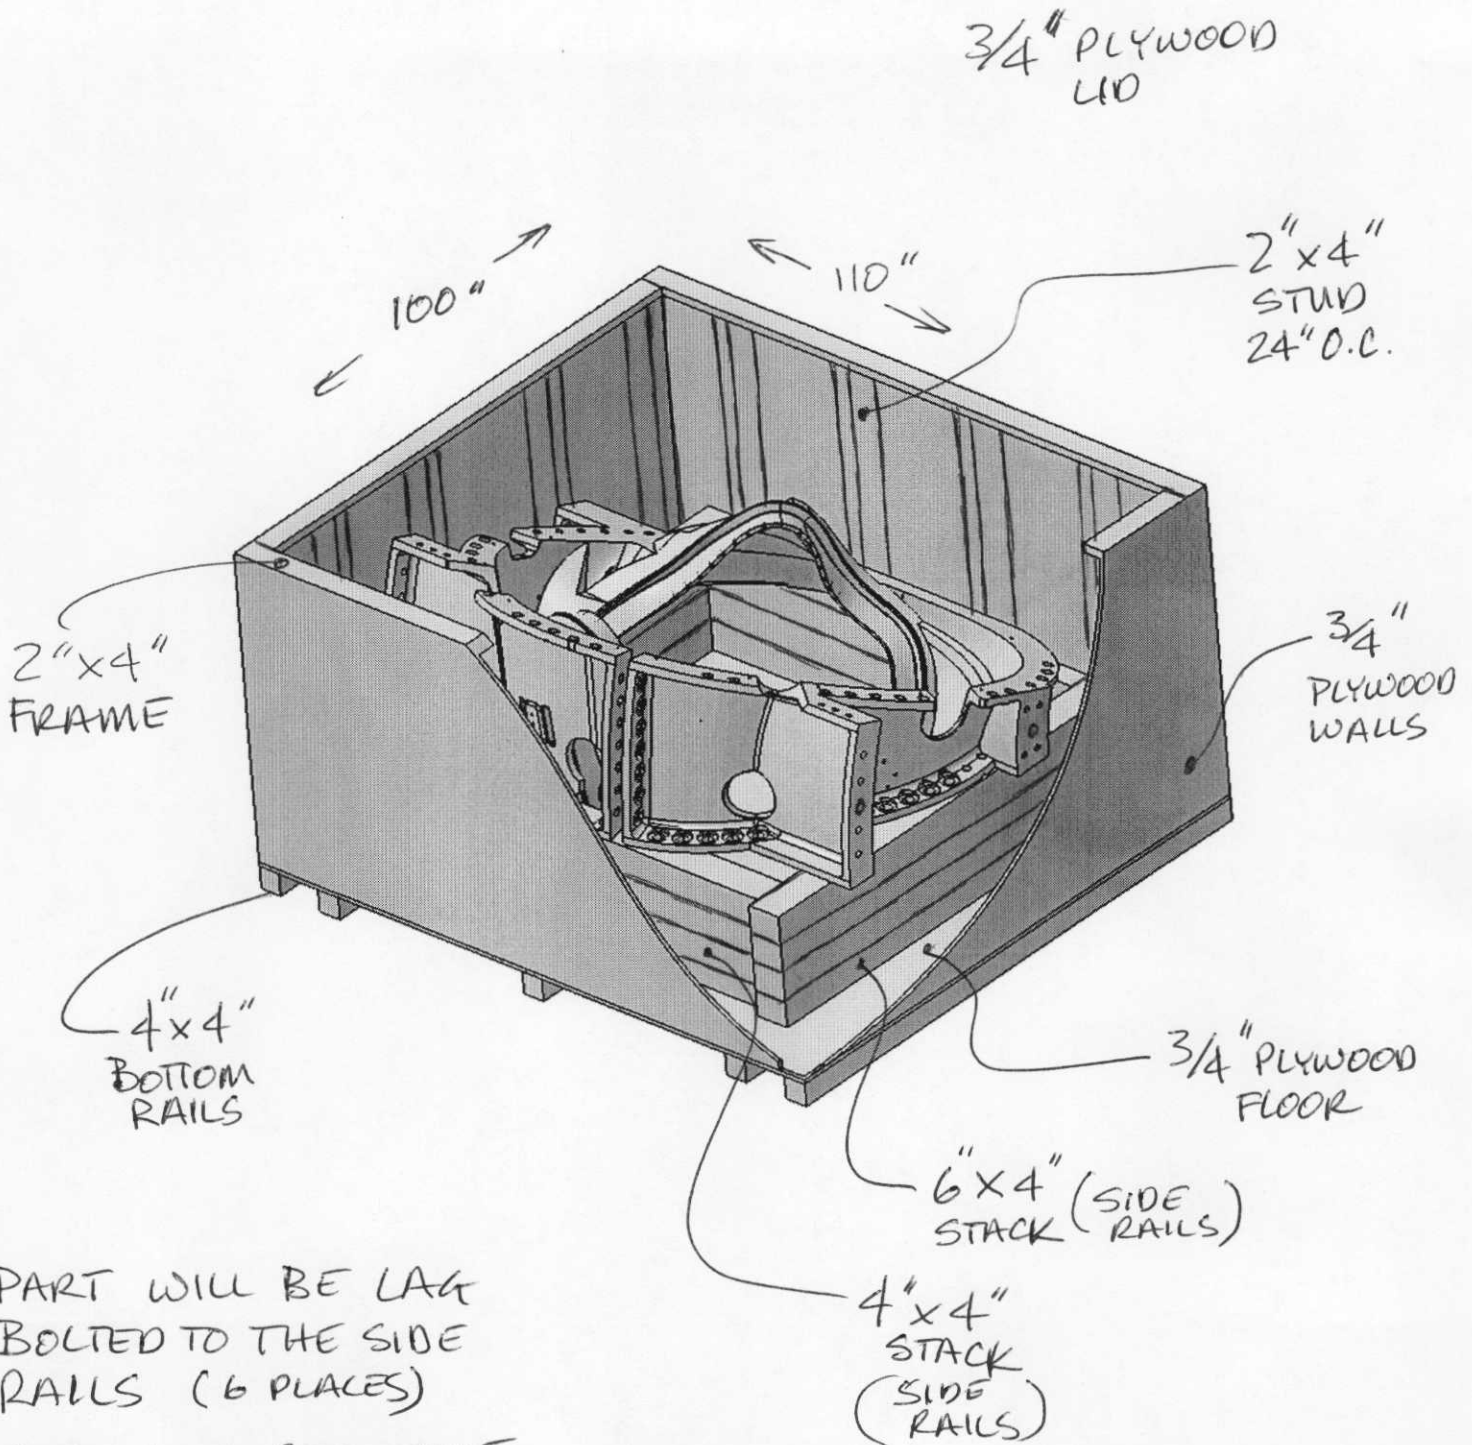

o PART WILL BE LAG BOLTED TO THE SIDE RAILS (6 PLACES)

o PART AND STRUCTURE MUST BE LIFTED EITHER WITH A FORK TRUCK OR USING LIFTING HOLES ON THE SIDES OF THE PART AFTER REMOVING THE TOP LID.