


- NOTES:
1. DRAWING PREPARED IN ACCORDANCE WITH ASME Y14.100.
 2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M.
 3. DIMENSIONS ARE IN INCHES.
 4. DIMENSIONS APPLY AT ROOM TEMPERATURE. OPERATING TEMP 80K.
 5. MAGNETIC PERMEABILITY NOT TO EXCEED 1.02 AS MEASURED BY INDICATOR AVAILABLE FROM SEVERN ENGINEERING, AUBURN, AL.

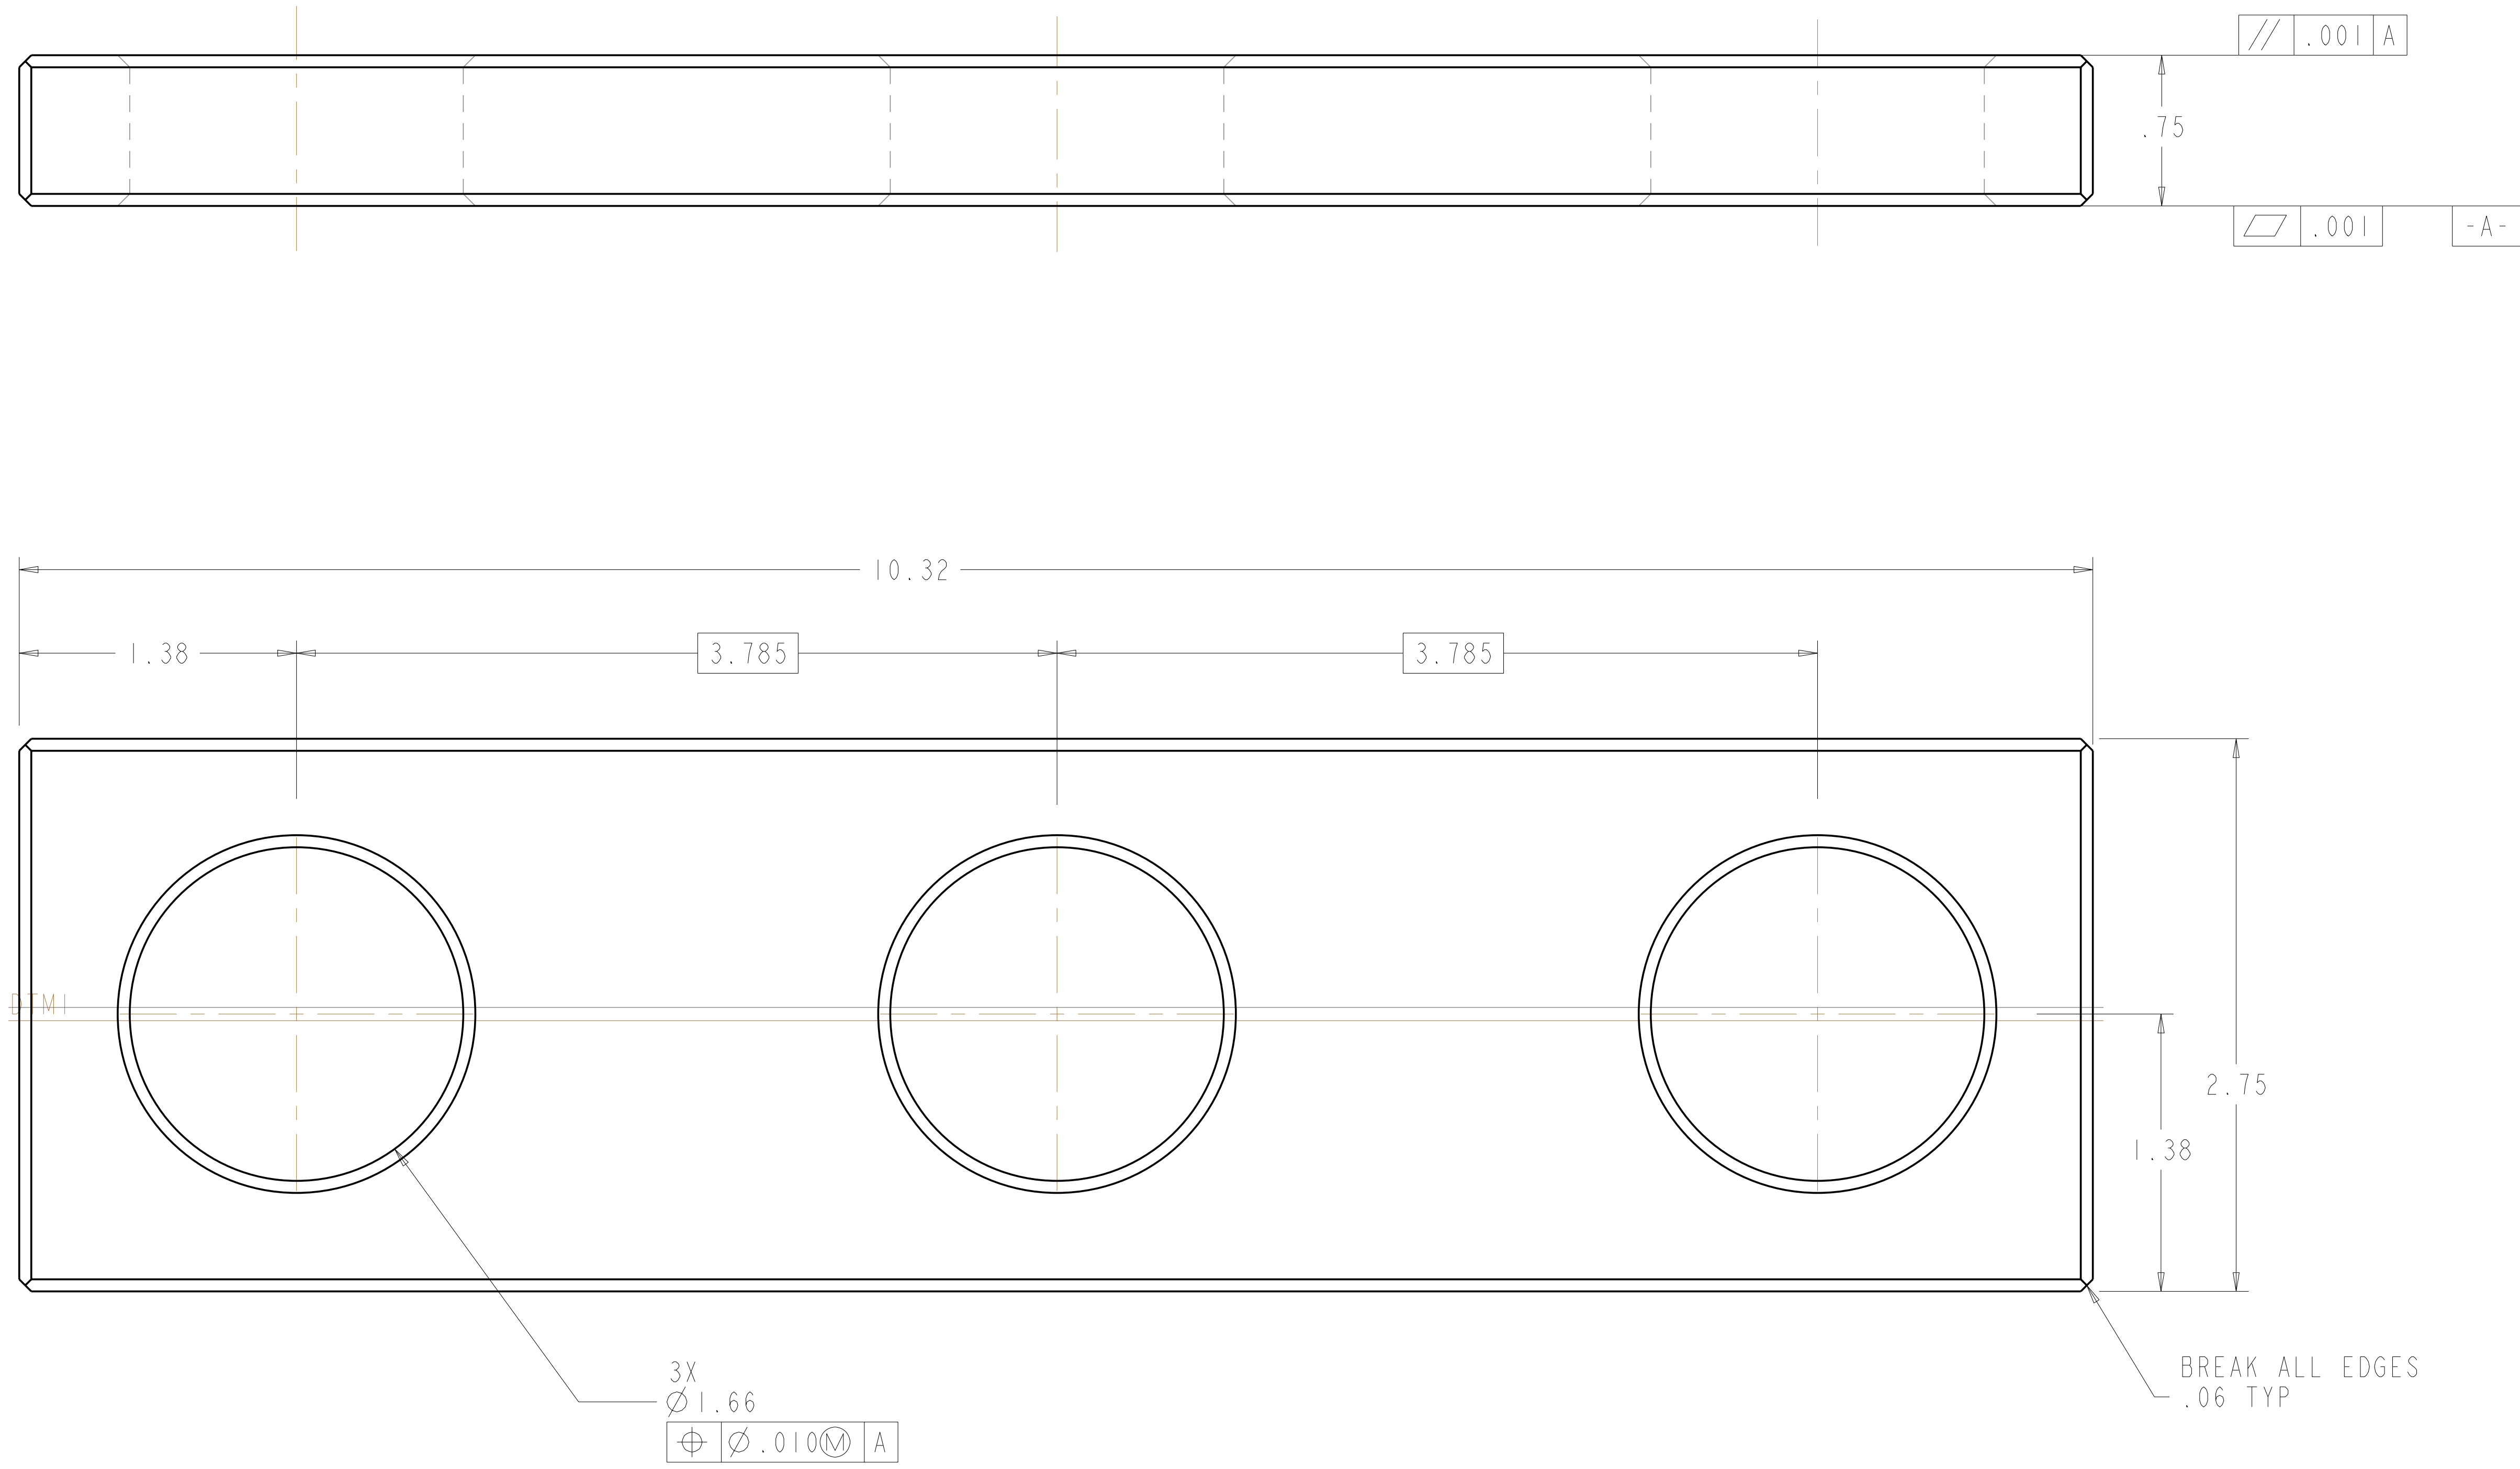

**RELEASED FOR
FABRICATION / INSTALLATION**
PPPL Drafting:

SCALE 2.00

| | | | | | |
|-----------|-----------|------------------------|-----------------------------|--------------------------|---------|
| AR | X | -1 | BEARING PLATE | UNS S31600 | I |
| next assy | CAGE CODE | PART OR IDENTIFYING NO | NOMENCLATURE OR DESCRIPTION | MATERIAL / SPECIFICATION | FIND NO |
| | | NEXT ASSEMBLY | PARTS LIST | | |

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-------------|----|------|-----|------|------|----|-----|------|------|-----|---------------------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| NO REPRESENTATION OR WARRANTY, EXPRESSED OR IMPLIED, IS MADE AS TO THE ACCURACY, COMPLETENESS OR USEFULNESS OF THE INFORMATION OR STATEMENTS CONTAINED IN THESE DRAWINGS, OR THAT THE USE OR DISCLOSURE OF ANY INFORMATION, APPARATUS, METHOD OR PROCESS DISCLOSED IN THESE DRAWINGS MAY NOT INFRINGE PRIVATE RIGHTS OF OTHERS. NO LIABILITY IS ASSUMED WITH RESPECT TO THE USE OF, OR FOR DAMAGES RESULTING FROM THE USE OF, ANY INFORMATION, APPARATUS, METHOD OR PROCESS DISCLOSED IN THESE DRAWINGS. DRAWINGS MADE AVAILABLE FOR INFORMATION TO BIDDER ARE NOT TO BE USED FOR OTHER PURPOSES, AND ARE TO BE RETURNED UPON REQUEST OF THE FORWARDING CONTRACTOR. | | | | | | | | | | | | THIS DRAWING PRODUCED ON PRO-ENGINEER | | | | | | | | | | | | <p>SCALE AS NOTED</p> <p>TOLERANCES UNLESS OTHERWISE SPECIFIED</p> <p>FRACTIONS ± .01</p> <p>XX DECIMALS ± .005</p> <p>XXX DECIMALS ± .0015</p> <p>ANGLES ± 0'15"</p> <p>BREAK SHARP EDGES .06 MAX</p> <p>FINISH .125 UNLESS OTHERWISE SPECIFIED</p> | | | | | | | | | | | | <p>DES B. NELSON 10-05</p> <p>DRW M. COLE 10-05</p> <p>CHK D. WILLIAMSON 10-05</p> <p>SECT :</p> <p>DEPT :</p> <p>PE D. WILLIAMSON 10-05</p> <p>CR :</p> <p>PJ :</p> <p>RED :</p> <p>PPPL DRFT J. SIEGEL 10-05</p> <p>DATE :</p> <p>DRAWING APPROVALS DATE :</p> | | | | | | | | | | | | <p>Oak Ridge National Laboratory managed for the DEPARTMENT OF ENERGY under U.S. GOVERNMENT contract DE-AC05-00OR22725 UT-BATTELLE, LLC. Oak Ridge, Tennessee</p> <p>UT-BATTELLE</p> <p>PRODUCT NAME</p> <p>NATIONAL COMPACT STELLARATOR EXPERIMENT</p> <p>MCFW POLOIDAL BREAK BEARING PLATE DETAIL</p> <p>VERSION NO. X-10</p> <p>PLANT BLDG FL SHT OF TYPE CLASS</p> <p>5700 3 1 1 S U</p> <p>RELEASE LEVEL SEI41-138</p> <p>REV 0</p> | | | | | | | | | | | |
| REV | DESCRIPTION | BY | DATE | CHK | DEPT | DATE | PE | REQ | DATE | DRNL | DOE | DATE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| REVISION OR ISSUE PURPOSE | | | | | | | | | | | | REVISION APPROVAL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

H
G
F
E
D
C
B
A